



# Sludge Spreaders

---



Spread widths from 40 to 65 ft, depending upon the material.

The Stoltzfus Sludge Spreader is designed for broadcasting heavy, sticky sludge from water or wastewater treatment plants. It is also rugged enough to spread damp ag lime, precise enough to spread fertilizer, and easily spreads compost and poultry litter. Application rates can vary from 500 to 13,000 lb / acre.

Model 1516 has a 223 cu.ft. (8.3 cu.yd.) hopper and a 15 ton capacity running gear. The 30 inch wide drag chain and the steep (53 degree) sides and UHMW plastic floor liner insure that the hopper empties completely.




Spread pattern testing with wastewater treatment sludge.

Model 8020 has a 400 cu.ft (14.8 cu.yd) hopper and can be configured with a high speed gearbox for very high applications rates.



PTO body chain  
 Hydraulic spinners  
 Hydraulic agitator\*  
 Hinged bar screen\*  
 Hydraulic shredder\*  
 Hydraulic rear gate\*

\* options

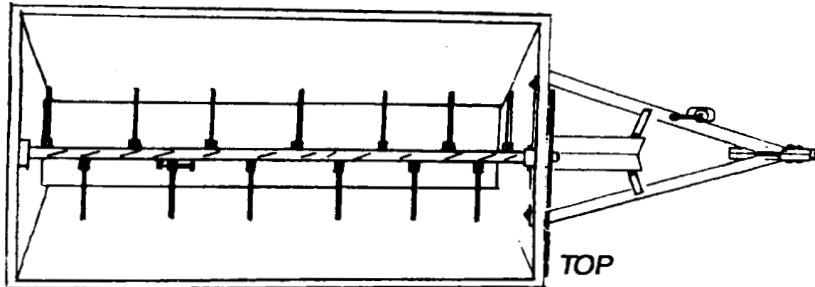

Low rpm “shredder” breaks up lumps for a smooth flow of material onto the spinners.



Low rpm flail agitator breaks up bridging in the stickiest materials.

**Stoltz Mfg., LLC**  
 121 Morgan Way, PO Box 527  
 Morgantown, PA 19543  
 610-286-5146  
**800-843-8731**  
 fax: 610-286-6600

**www.stoltzmfg.com**

Suspension: 5,8 and 15 tons  
 Walking beam

Hoppers: 10 ft, 137 cu.ft.  
 16 ft, 223 cu.ft.  
 20 ft, 400 cu.ft.